

# Baler

## Benefits

- Savings on your waste collection
- Tidy premises
- Space saving
- Compliance to meet your legal obligations

## Features

- Front loading
- High performance
- Large loading aperture
- Mill size bale

ORWAK 3800

 **ORWAK**<sup>®</sup>



# ORWAK 3800

## The king-size baler with a huge appetite

A load of cardboard boxes up to 1500 mm wide is compacted in seconds. You feed the 3800 safely and conveniently. In return you'll get valuable storage space and cost reduction due to increased recycling. Trouble-free operation.



The King-Size Baler's wide mouth (one square metre) can swallow large volumes of recyclable materials. Sliding door automatically opens after each cycle. User friendly.

### Our promise to You!

- Orwak financial solutions
- Orwak money back guarantee
- Orwak non-stop service

For further information please contact Your local Orwak dealer.

#### The Orwak 3800 takes care of most of your waste

##### Paper

- Cardboard
- Shredded
- Paper sacks

##### Metal Cans

- Aluminium cans
- Food cans
- Paint cans

##### Other metals

- Steel straps

##### Plastic foil

- Shrink film
- Plastic bags

##### Plastic containers

- PET bottles
- Jugs/bottles

##### Other plastics

- Plastic straps

##### Semi-dry Waste

- Bagged general waste

##### Wet

- Juice boxes, Tetra paks

##### Special

- Steel drums
- Hazardous waste

● Perfect choice

● OK

Other materials contact us


For more info. contact us or visit our website [www.orwak.com](http://www.orwak.com)

#### Technical specifications

Dimensions  
**3800**

A:	3183 mm
B:	1931 mm
C:	1065 mm
D:	2588 mm
E:	1205 mm
F*:	2325 mm

\*Transport Height

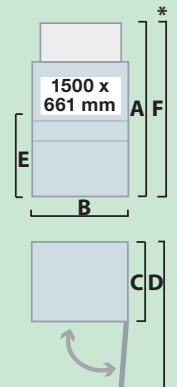

#### Loading aperture

Width:	1500 mm
Height:	661 mm

<b>Cycle time</b>	41 secs
-------------------	---------

<b>Press force</b>	24 ton, 240 kN
--------------------	----------------

<b>Bale size</b>	
Width:	1500 mm
Depth:	800 mm
Height:	1100 mm

<b>Bale weight</b>	
Cardboard:	Up to 500 kg

<b>Chamber dimension (internal)</b>	
Width:	1500 mm
Depth:	800 mm
Height:	1760 mm

<b>Weight (machine)</b>	
Total:	1765 kg

<b>Noise level</b>	< 80 db (A)
--------------------	-------------

<b>Protection class</b>	IP 55
-------------------------	-------

<b>Operating power</b>	3-phase 3x400 V, 50 Hz
------------------------	------------------------

<b>Electrical connection</b>	5 pin CEE-plug, 10 A
------------------------------	----------------------

<b>Operating voltage</b>	Via transformer 24 V AC/DC
--------------------------	----------------------------

<b>Ground/top coatings</b>	Anti-corrosive primer/ two part paint and powder coat
----------------------------	--

<b>Oil volume/type</b>	20,8 l ISO VG 32-68 SAE 10 from 0°C and warmer
------------------------	---

<b>Hydraulical data</b>	
Working pressure:	235 bar
Relief pressure:	265 bar
Press force:	24 ton, 240 kN
Piston stroke:	1000 mm
Press force per cm <sup>2</sup> :	2,0 kg

We reserve the right to make changes to specifications without prior notice. Bale/bag/bin weights are dependent upon material type.



[www.orwak.com](http://www.orwak.com) info@orwak.se  
A member of the Orwak Group